


Please amend the claims as follows.

In the Claims:

Claims 1 – 23 (Cancelled)


24. (currently amended) A plastic material having at least one face coated with a cured layer of an abrasion or scratch resistant coating composition comprising:

- (A) a component which is the reaction product with oxalic acid of at least one organometallic compound of formula:




wherein M is a metal, R is H or an alkyl radical, R^l is a chelating ligand, x is the valency of the metal, y is an integer at least equal to 1 and x-y is at least equal to 1; and

- (B) at least one organoalkoxysilane of formula:



wherein R^2 is an alkyl radical, R^3 is an epoxidized alkyl group and n is an integer from 1 to 3, or a mixture of the organoalkoxysilane of formula (II) with an alkoxysilane of formula (II')



wherein n' is an integer from 0 to 3,

R'' is H, an alkyl radical or an alkoxyalkyl radical, and

R' is a vinyl, (meth)acryl, aromatic, cyclic or aliphatic alkyl radical,


~~wherein the cured abrasion resistant layer of the composition as set forth in claim 24 is deposited on top of a first abrasion resistant coating comprising a (meth)acrylic or polysiloxane cured material wherein said cured layer of an abrasion or scratch resistant coating composition is deposited on top of a first abrasion-resistant coating comprising a polysiloxane cured material.~~

25. (original) The plastic material substrate according to claim 24, wherein M is selected from Ti, Zr, Sc, Nb, V, Hf, Cr, Y, Al, Ge, Sn, Ta, and W.

26. (canceled)

27. (previously amended) The plastic material substrate according to claim 24, wherein R¹ is a ligand produced from a compound of formula L¹COCH₂COL² or L³COCH₂COOL⁴, wherein L¹, L², L³, and L⁴ are C₁-C₄ lower alkyl groups.

28. (original) The plastic material substrate according to claim 24, wherein the organoalkoxysilane has formula:

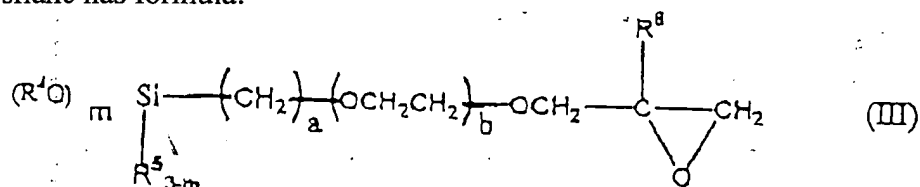

wherein R⁴ is an alkyl or alkoxy alkyl group having 1 to 4 carbon atoms; R⁵ is an alkyl or aryl group having 1 to 6 carbon atoms; R⁶ is H or a methyl group, m is 2 or 3, a is an integer from 1 to 6 and b is 0, 1 or 2.


29. (original) The plastic material substrate according to claim 28, wherein the organoalkoxysilane is selected from the group consisting of γ -glycidoxypropyltrimethoxysilane, γ -glycidoxypropyltriethoxysilane, γ -glycidoxypropylmethyldimethoxysilane, γ -glycidoxypropylmethyldiethoxysilane, and γ -glycidoxyethoxypropylmethyldimethoxysilane.

30. (original) The plastic material substrate according to claim 24, wherein components (A) and (B) are further partially or fully hydrolyzed.

31. (canceled)

32. (previously presented) The plastic material substrate of claim 24, wherein the polysiloxane coating is a coating obtained from a hydrolyzate of a silane compound containing an epoxy group and at least two alkoxy groups directly linked to silicon.


33. (original) The plastic material substrate according to claim 32, wherein the silane compound has formula:

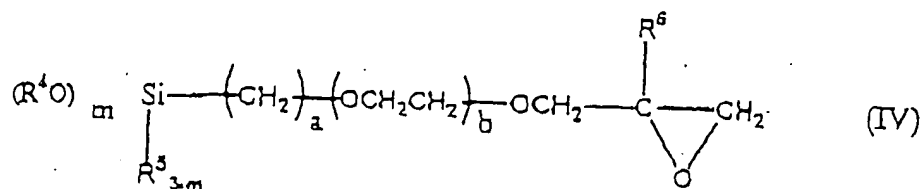

wherein R⁴ is an alkyl or alkoxy alkyl group having 1 to 4 carbon atoms; R⁵ is an alkyl or aryl group having 1 to 6 carbon atoms; R⁶ is H or a methyl group, m is 2 or 3, a is an integer from 1 to 6 and b is 0, 1 or 2.


34. (currently amended) A plastic material having at least one face coated with a cured layer of an abrasion or scratch resistant coating composition comprising:

(C) a component which is the reaction product with oxalic acid of at least one organometallic compound of formula:



wherein M is a metal, R is H or an alkyl radical, R¹ is a chelating ligand, x is the valency of the metal, y is an integer at least equal to 1 and x-y is at least equal to 1; and

(D) at least one organoalkoxysilane of formula:



wherein R² is an alkyl radical, R³ is an epoxidized alkyl group and n is an integer from 1 to 3, or a mixture of the organoalkoxysilane of formula (II) with an alkoxysilane of formula (II')



wherein n' is an integer from 0 to 3,

R'' is H, an alkyl radical or an alkoxyalkyl radical, and

R' is a vinyl, (meth)acryl, aromatic, cyclic or aliphatic alkyl radical,


wherein the cured abrasion-resistant layer of the composition as set forth in claim 24 is deposited on top of a first abrasion-resistant coating comprising a (meth)acrylic or polysiloxane cured material. ~~The plastic material substrate of claim 24,~~ wherein the cured abrasion-resistant layer of the composition ~~as set forth in claim 24~~ is deposited on top of a first cured layer of an abrasion-resistant composition including at least one hydrolyzate of silane compounds containing an epoxy group and at least two alkoxy groups, colloidal silica and at least one aluminum chelate compound.

35. (original) An ophthalmic lens comprising a plastic material substrate as set forth in claim 24.

36. (original) An ophthalmic lens comprising a plastic material substrate as set forth in claim 34.


37. (New) A plastic material having at least one face coated with a cured layer of an abrasion or scratch resistant coating composition comprising:

(E) a component which is the reaction product with oxalic acid of at least one organometallic compound of formula:




wherein M is Ti or Zr, R is H or an alkyl radical, R^1 is a chelating ligand, x is the valency of the metal, y is an integer at least equal to 1 and x-y is at least equal to 1; and

(F) at least one organoalkoxysilane of formula:



wherein R^2 is an alkyl radical, R^3 is an epoxidized alkyl group and n is an integer from 1 to 3, or a mixture of the organoalkoxysilane of formula (II) with an alkoxysilane of formula (II')



wherein n' is an integer from 0 to 3,

R'' is H, an alkyl radical or an alkoxyalkyl radical, and

R' is a vinyl, (meth)acryl, aromatic, cyclic or aliphatic alkyl radical,

wherein the cured abrasion-resistant layer of the composition is deposited on top of a first abrasion-resistant coating comprising a (meth)acrylic or polysiloxane cured material.